


Stabliste - Biegeformen


| Pos. | Stück | Ø [mm] | Einzel Länge [m] | Bemaßte Biegeform (unmaßstäblich) | Gesamt Länge [m] | Masse [kg] |
|------|-------|--------|------------------|-----------------------------------|------------------|------------|
| 1 | 1 | 12 | Lfdm | | 290,00 | 257,52 |
| 2 | 486 | 10 | 1,53 | 70 | 743,58 | 458,79 |
| 3 | 398 | 10 | 1,50 | 150 | 597,00 | 368,35 |
| 4 | 8 | 16 | 12,00 | 1200 | 96,00 | 151,68 |
| 5 | 4 | 16 | 4,20 | 420 | 16,80 | 26,54 |
| 6 | 28 | 20 | 14,00 | 1400 | 392,00 | 968,24 |
| 7 | 324 | 10 | 2,17 | 100 | 703,08 | 433,80 |
| 8 | 40 | 12 | 2,17 | 100 | 86,80 | 77,08 |
| 9 | 94 | 10 | 6,00 | 600 | 564,00 | 347,99 |
| 10 | 7 | 25 | 14,00 | 1400 | 98,00 | 377,30 |
| 11 | 2 | 12 | 3,00 | 300 | 6,00 | 5,33 |
| 12 | 28 | 12 | 2,00 | 200 | 56,00 | 49,73 |
| 13 | 210 | 10 | 1,13 | 50 | 237,30 | 146,41 |
| 14 | 2 | 12 | 3,70 | 370 | 7,40 | 6,57 |
| 15 | 8 | 12 | 4,60 | 460 | 36,80 | 32,68 |
| 16 | 34 | 12 | 2,40 | 240 | 81,60 | 72,46 |
| 17 | 12 | 12 | 2,70 | 270 | 32,40 | 28,77 |
| 18 | 8 | 12 | 3,80 | 380 | 30,40 | 27,00 |
| 19 | 182 | 12 | 2,79 | 200 | 507,78 | 450,91 |
| 20 | 243 | 8 | 4,00 | 400 | 972,00 | 383,94 |
| 21 | 2 | 12 | 2,80 | 280 | 5,60 | 4,97 |
| 22 | 17 | 10 | 3,00 | 300 | 51,00 | 31,47 |
| 23 | 62 | 10 | 2,00 | 200 | 124,00 | 76,51 |

Gesamtmasse [kg]: 4784,04


Schnitt 1-1
M.1:25




Schnitt 2-2
M.1:25

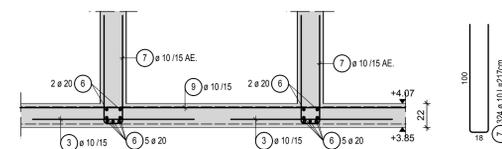


Schnitt 3-3
M.1:25



Schnitt 4-4
M.1:25



Schnitt 5-5
M.1:25



Unterstützungselement für obere Lage
Decke über EG d= 22 cm

Flattendicke d = 22,0cm
 Betondeckung oben c2 = 2,5cm
 Obere Bewehrung b2 = 2,0cm
 Betondeckung unten c1 = 2,5cm
 Untere Bewehrung b1 = 2,5cm
 Unterstützung h = 12,5cm

gewähltes Unterstützungselement:
 [13] BT12
 [13] 260° BT12 LB=2009